


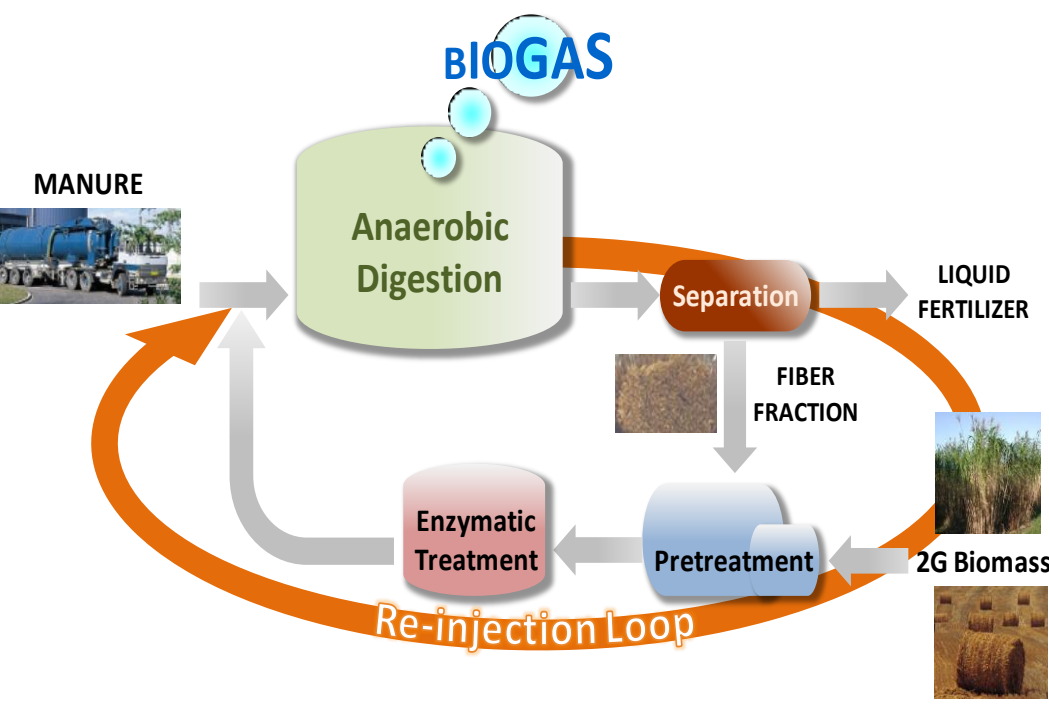

BIOMAN

Economically efficient biogas production from manure fibres and straw

H. Uellendahl¹, L. Ottosen², B. Ruiz³, B. Malmgren-Hansen², L. Bailón Allegue², J. Hinge², S.I. Njoku¹ and C. Kragelund^{2*}

¹ Section for Sustainable Biotechnology, Aalborg University Copenhagen, A C Meyers Vænge 15, 2450 Copenhagen SV, Denmark.

² Danish Technological Institute, Kongsvang Allé 29, DK-8000 Aarhus C, Denmark, *corresponding author cakr@dti.dk

³ ainia centro tecnológico, Parque Tecnológico de Valencia c. Benjamin Franklin 5-11, E-46980 Paterna (Valencia), Spain

Introduction

There is a huge untapped biogas potential from manure and agricultural residues in Europe and worldwide. However, these substrates consist of a large fraction of fibres (range 5-80% of dry matter content) with a low methane potential but the economy for operation of biogas plants based on these biomass resources is marginal due to their low biogas yield per ton. The biogas yield can be improved if pretreatments are applied e.g. mechanical, thermal, chemical and biological (Angelidaki & Ahring, 2000; Uellendahl et al., 2007), but so far none have proven economically feasible. Therefore, there is an increasing demand for developing a treatment concept as the Re-Injection Loop for increasing the biogas yield per ton of waste biomass, with a prerequisite that the benefits of the treatment exceed the operational costs to ensure economical sustainability.

The Re-Injection Loop Concept

"The Re-Injection Loop" is for producing biogas from recalcitrant low-energy substrates with a high content of lignocellulose by combining a range of mechanical and enzymatic treatments, see **Figure 1**. Downsizing, ultra sound and enzymatic treatments are technologies to be used in the Re-Injection Loop and will be applied on pre-digested and dewatered biomasses before recirculation to the biogas reactor and of key focus is the overall economic sustainability (Uellendahl et al., 2013).

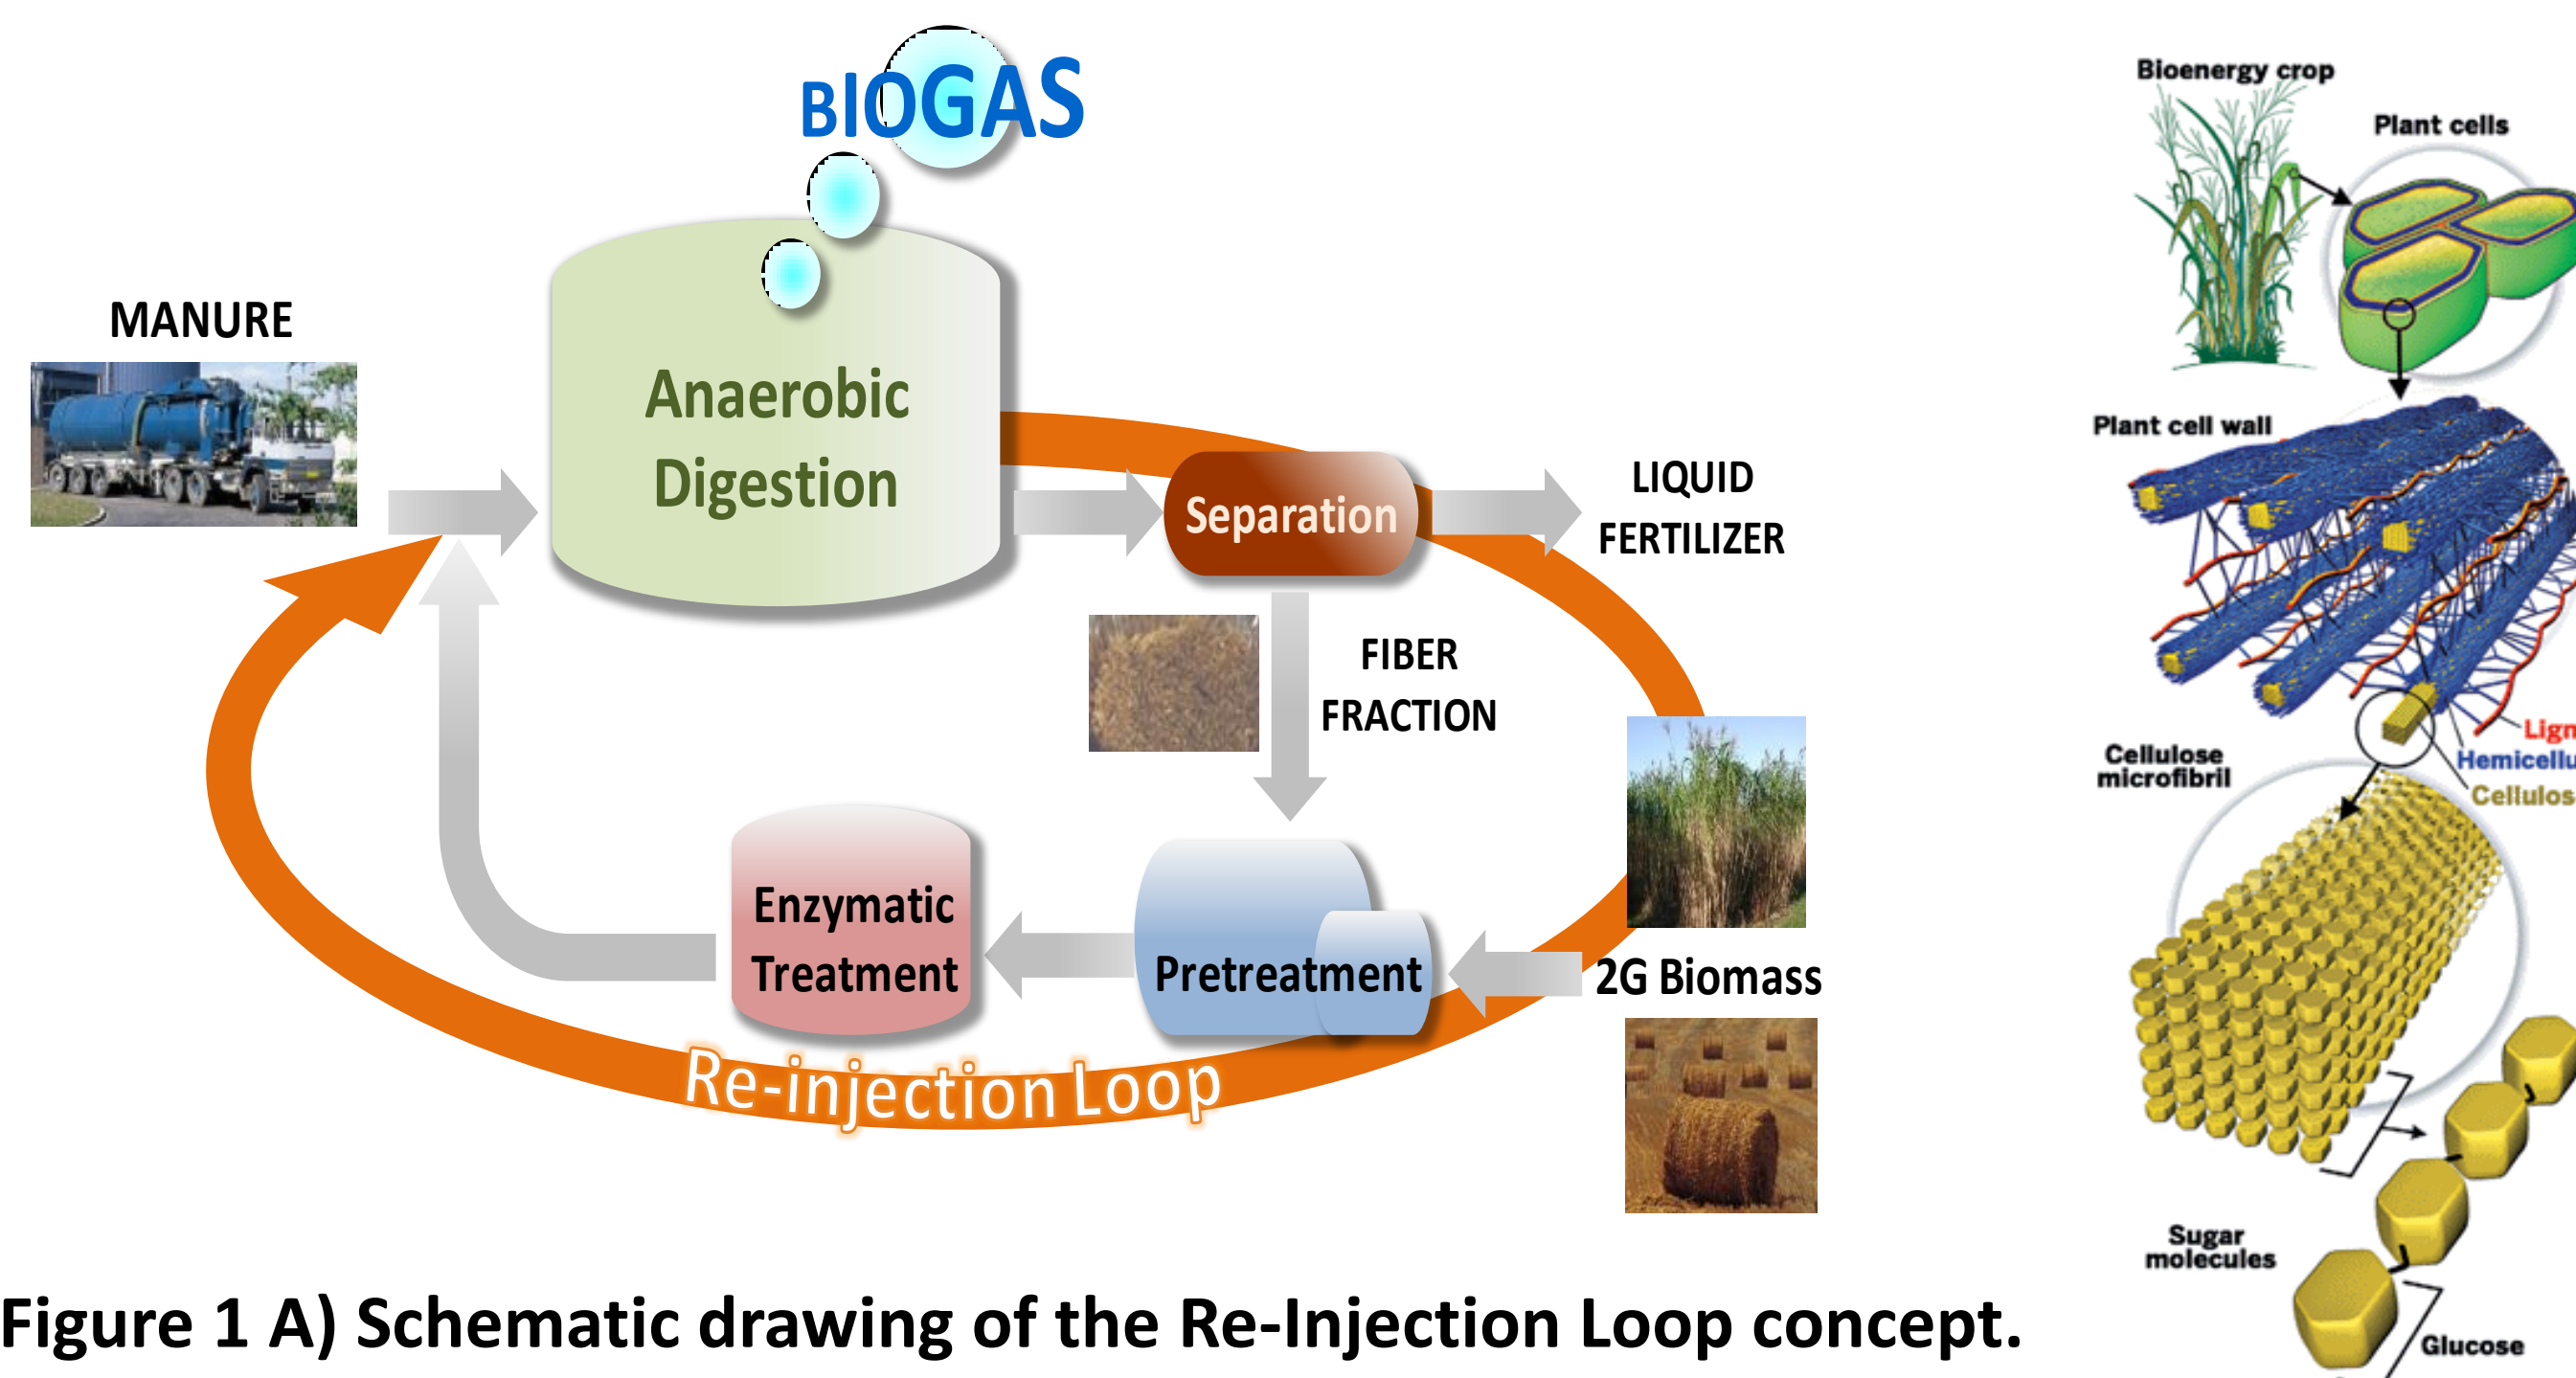


Figure 1 A) Schematic drawing of the Re-Injection Loop concept. B) Drawing of lignin, cellulose and hemicellulose in plants

Table 1. Overview of total solid concentration following separation methods

	Total solids (%w/w)				
Separation method	Inlet	Solid fraction Fibre	Liquid fraction Reject	% of total VS in fibre fraction	Potential methane increase %
Centrifugation Day 1	5.8	27	2.9	62	37
Screw press Day 2	5.1	31.3	3.7	39	20
Bow Screen Day 1	5.8	8.2	4.4	58	35

BioMethane Potential

A number of relevant substrates suitable for the Re-Injection loop is selected for extensive chemical characterization. Biomethane potential (BMP) measurements will be performed, serving as baseline for evaluation of the listed pretreatment technologies. The most suitable combination of physical and enzymatic treatments will be identified along with the life cycle economical calculations. Pilot scale development and evaluation of the Re-Injection Loop will be conducted prior to full scale implementation and demonstration at a recently established biogas plant in Spain.

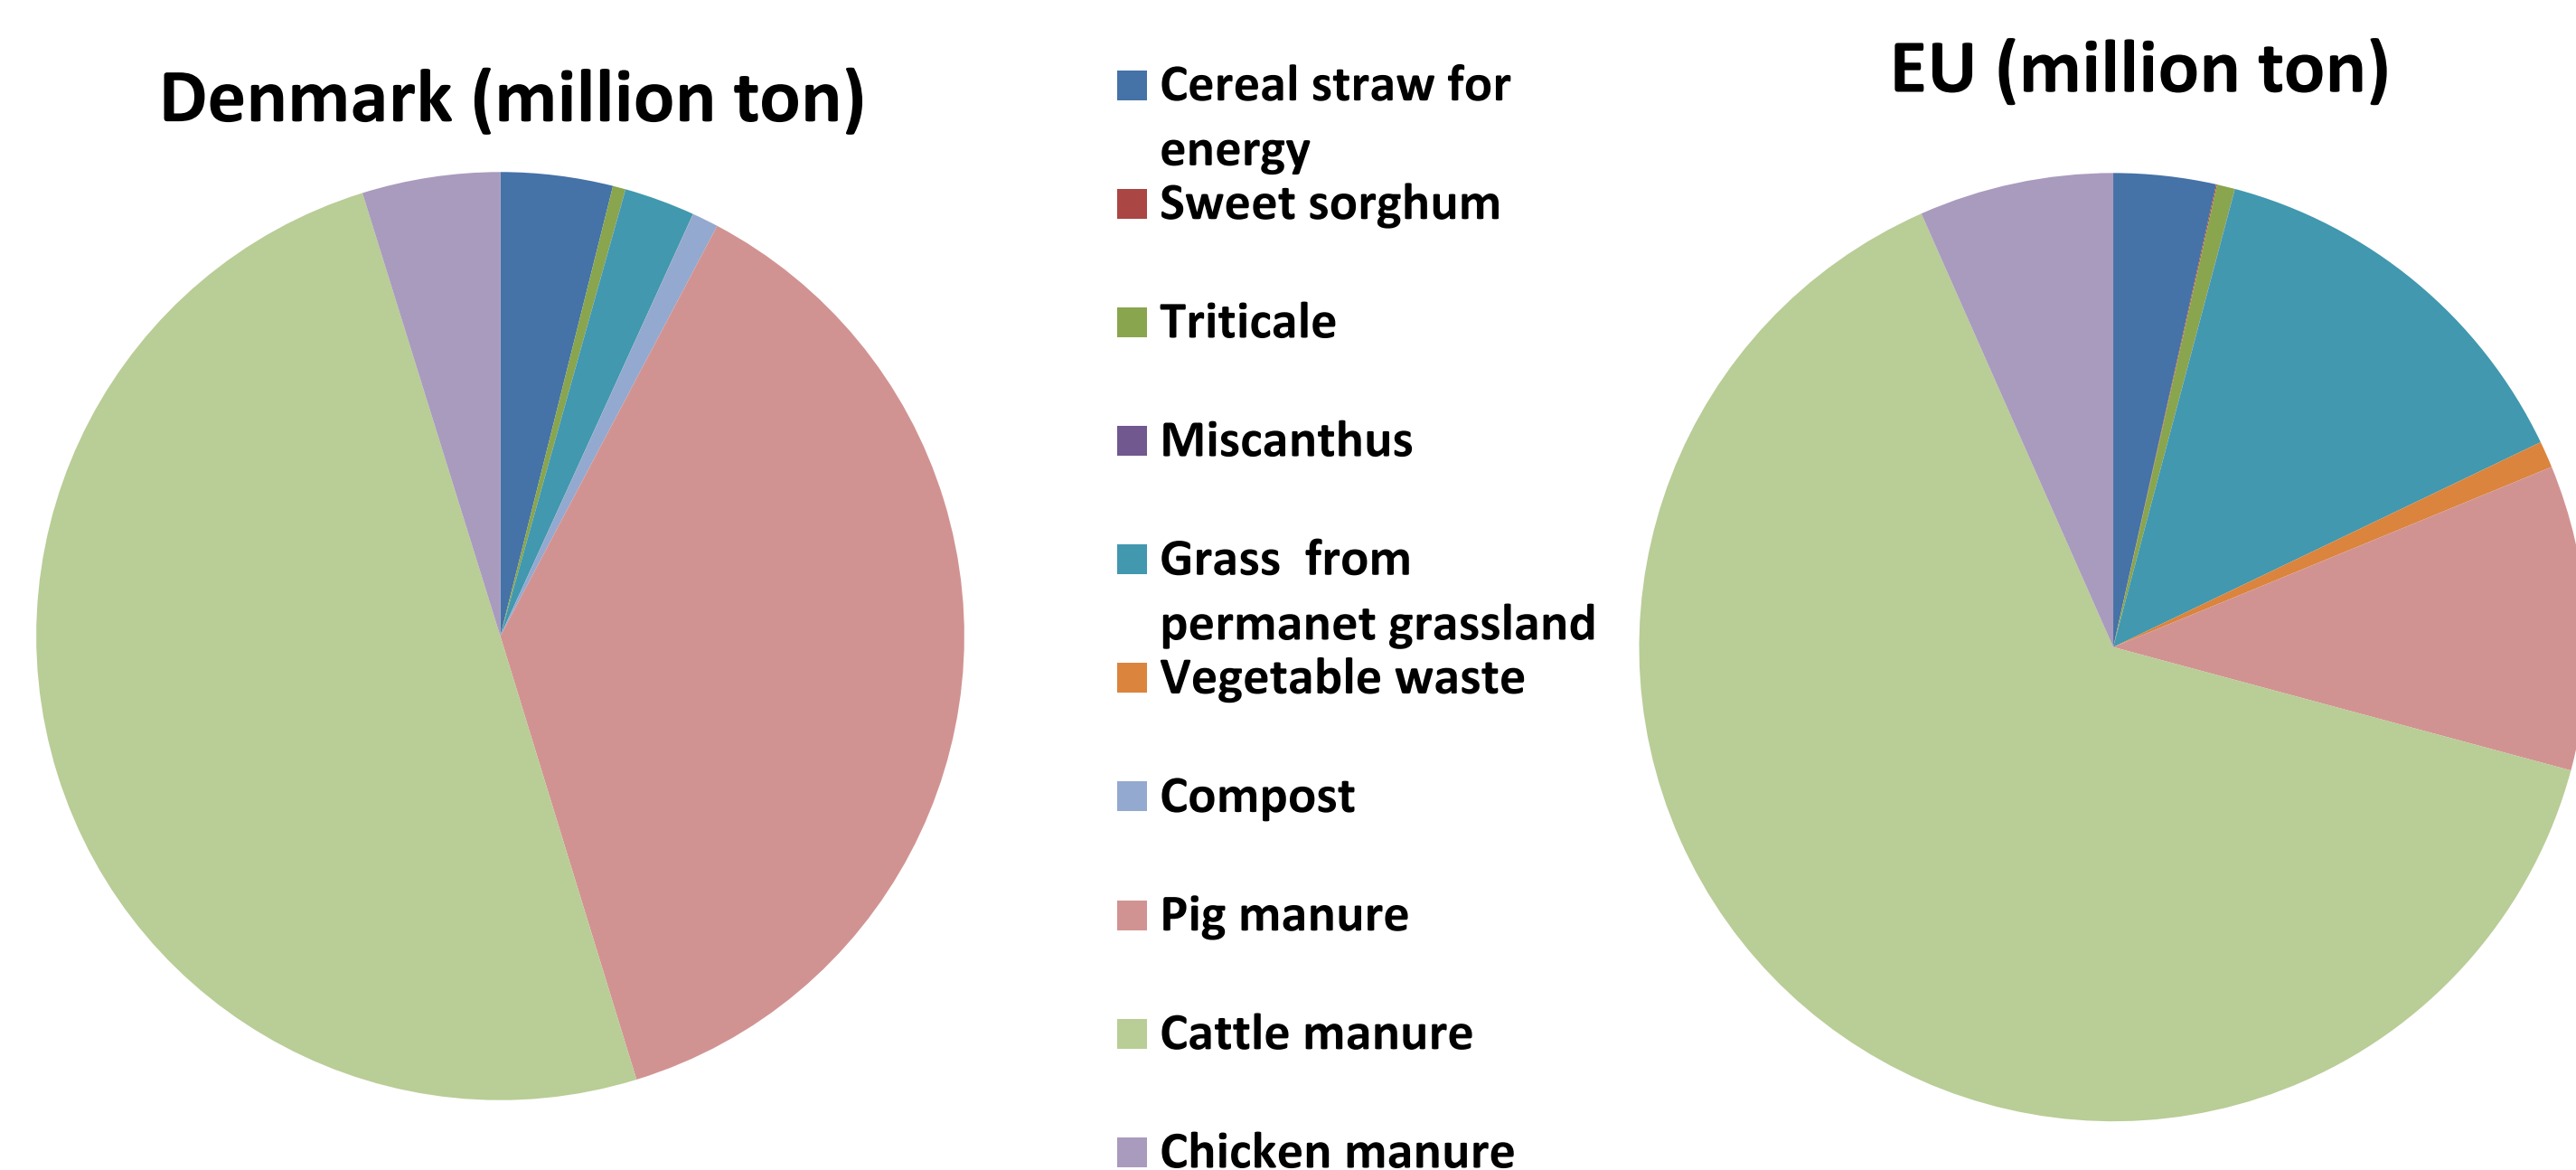


Figure 2. Amounts of biomass types applicable for the Re-Injection Loop in Denmark (38 mill. ton) and in Europe (1702 mill. ton).

Experimental approach

A survey of substrate availability within Denmark and Europe was conducted and results are depicted in **Figure 2**. Included were both digested and some undigested "green" substrates. Different separation technologies for pre-digested biomass were assessed with respect to separation efficiency and characteristics of fibre products at Morsø BioEnergi plant, shown in **Table 1**. Based on mass balances, theoretical methane potential and an expected conversion efficiency of 50%, the potential increase of methane production has been estimated in the range of 20-37%.

Acknowledgement

BIOMAN is funded by the European Union's Seventh Framework Programme managed by REA - Research Executive Agency: <http://ec.europa.eu/research/rea> (FP7/2007-2013) under grant agreement n° FP7-SME-2012, 315664, "**BIOMAN**".

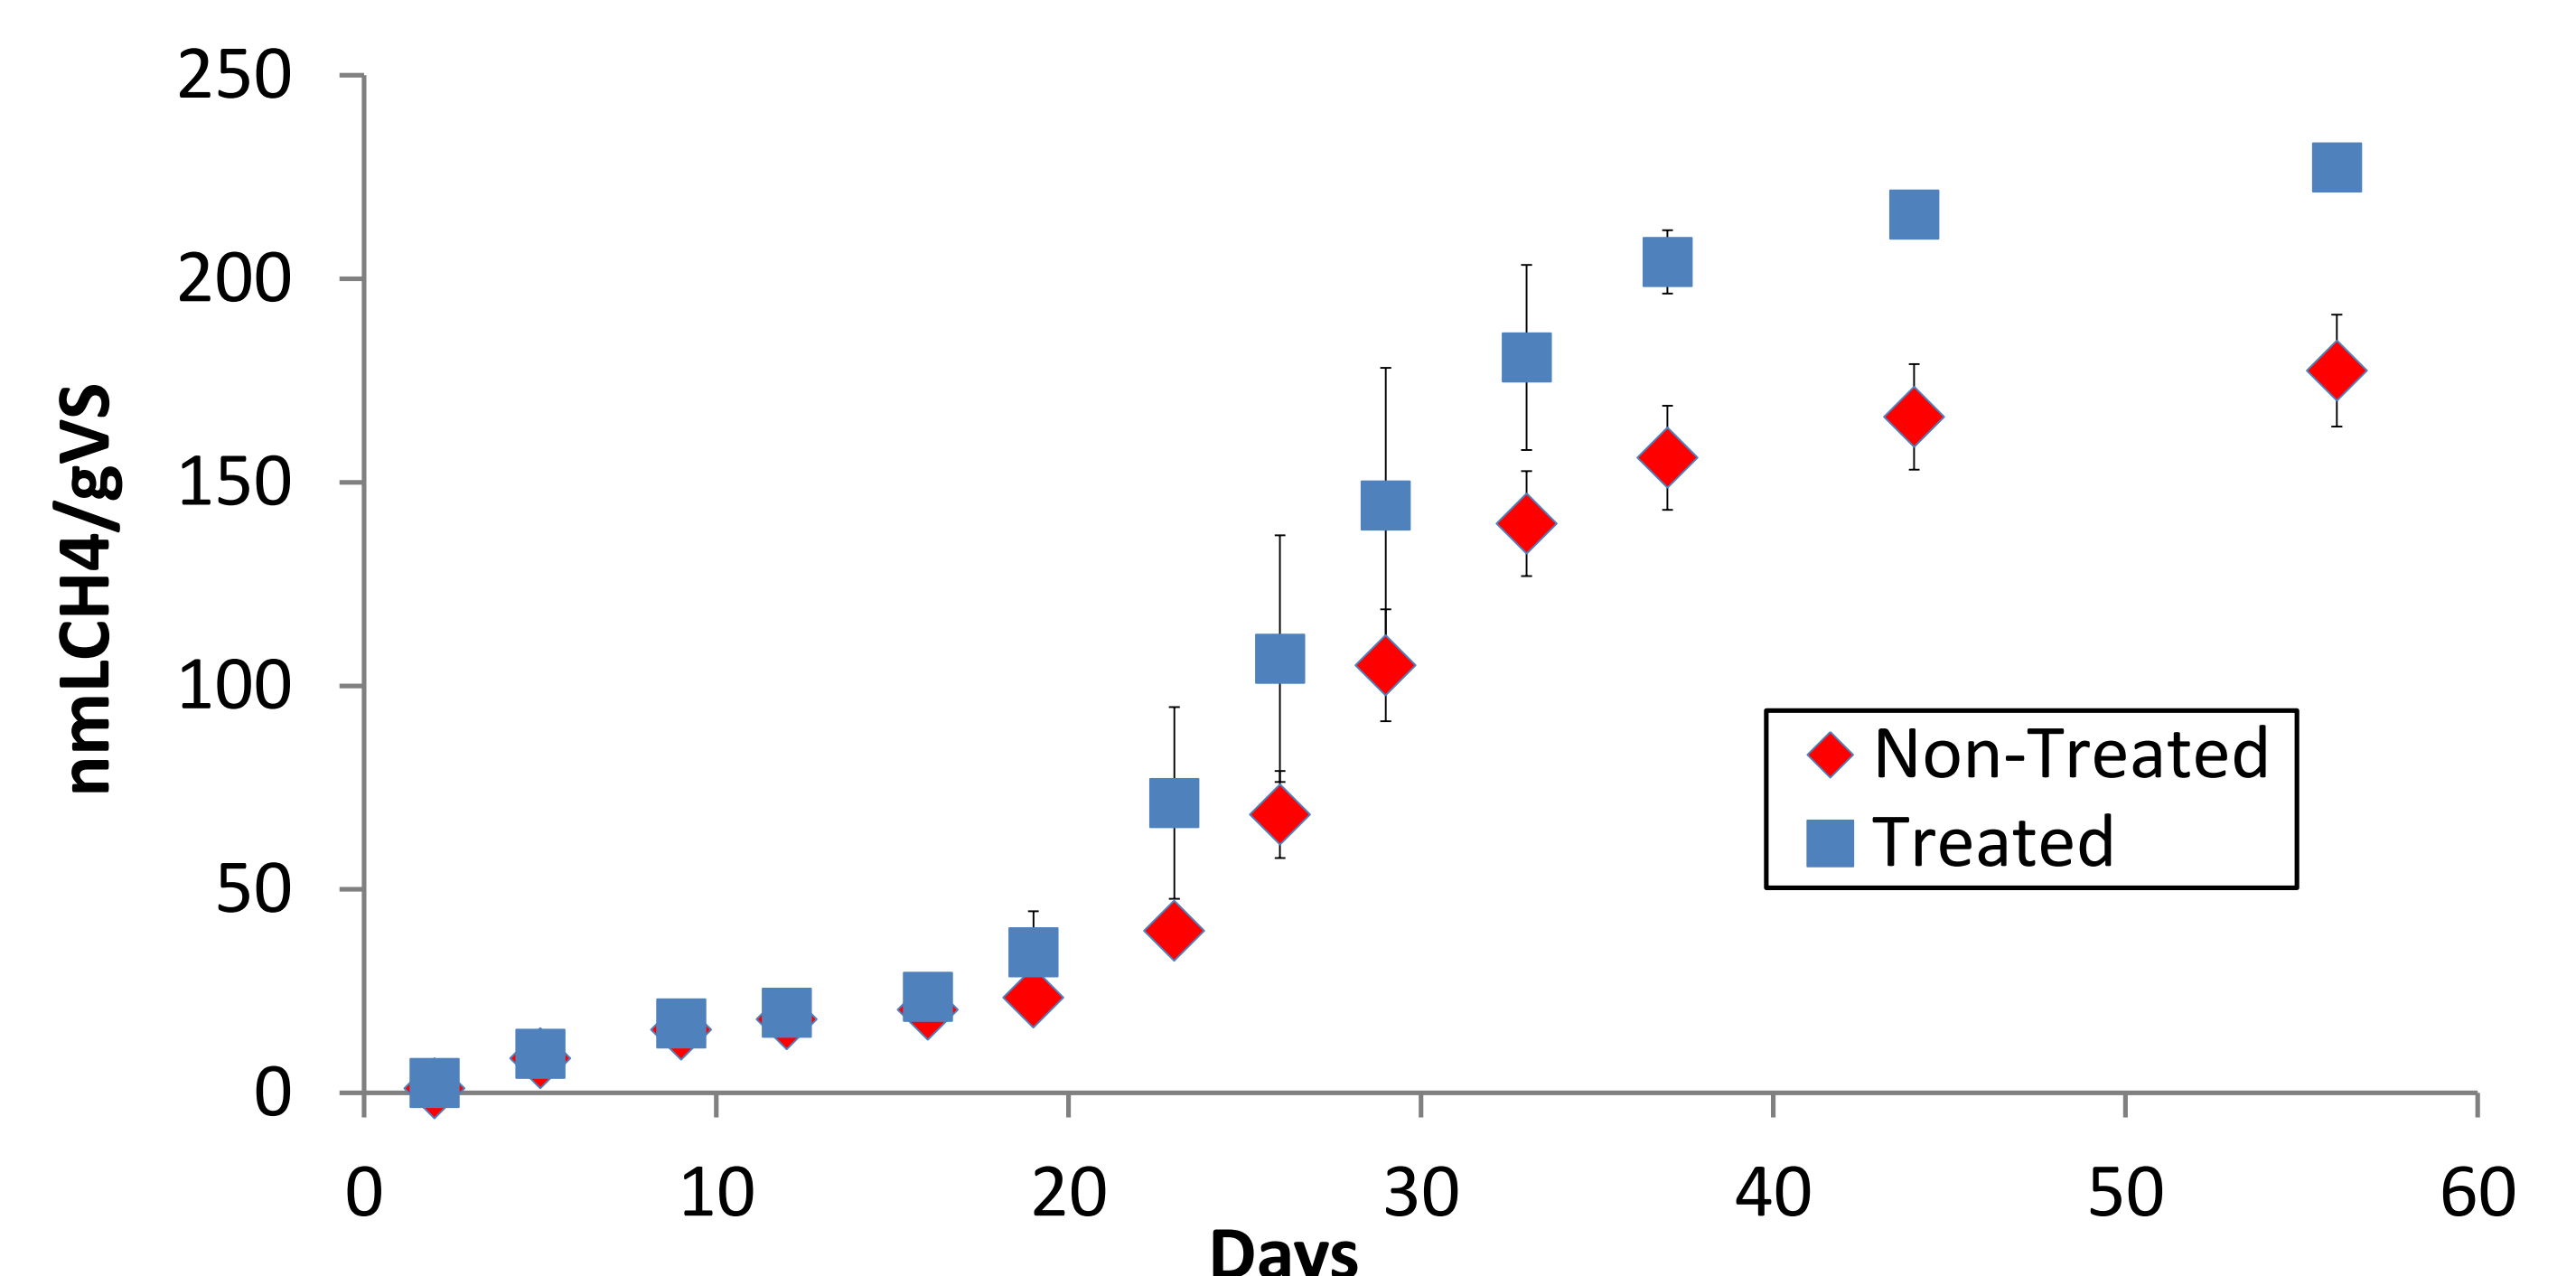


Figure 3. Example of BMP evaluation of pretreatments.

Conclusions and perspectives

- The Re-Injection loop is directed at recalcitrant degassed substrates (**Figure 1**)
- Abundant resources available for biogas production within EU (**Figure 2**)
- Combination of pretreatments for the Re-Injection loop will be determined by BMP measurements and chemical characterization (**Figure 3**)

References

- Uellendahl, H., Njoku, S.I., Kragelund, C., Ottosen, L., Ruiz, B. (2013). Boosting the economy of manure based biogas plants. Proceedings of the International Anaerobic Digestion Symposium at BiogasWorld 2013, April 23-25, Berlin.
- Angelidaki, I. and Ahring, B. K. (2000): Methods for increasing the biogas potential from the recalcitrant organic matter contained in manure. *Water Science & Technology*, **41**(3): 189-194.
- Uellendahl, H., Mladenovska, Z. and Ahring, B.K. (2007): Wet oxidation of crude manure and manure fibres: Substrate characteristics influencing the pretreatment efficiency for increasing the biogas yield of manure. *Proceedings 11th World Congress on Anaerobic Digestion*, 23-27 September, 2007, Brisbane, Australia.